




FL.7, TianHe Building, 216 North Zhongshan Road.  
Nanjing, Jiangsu Province, China  
Post Code: 210003  
Tel: 025-83472872 Fax: (8625)83410082  
E-mail: sales@chinabase-e.com  
www.chinabase-e.cn



All Rights Reserved by CHINABASE Co., Ltd.  
Due to the continuous improvement of the technical parameter of this manual is subject to change without notice.

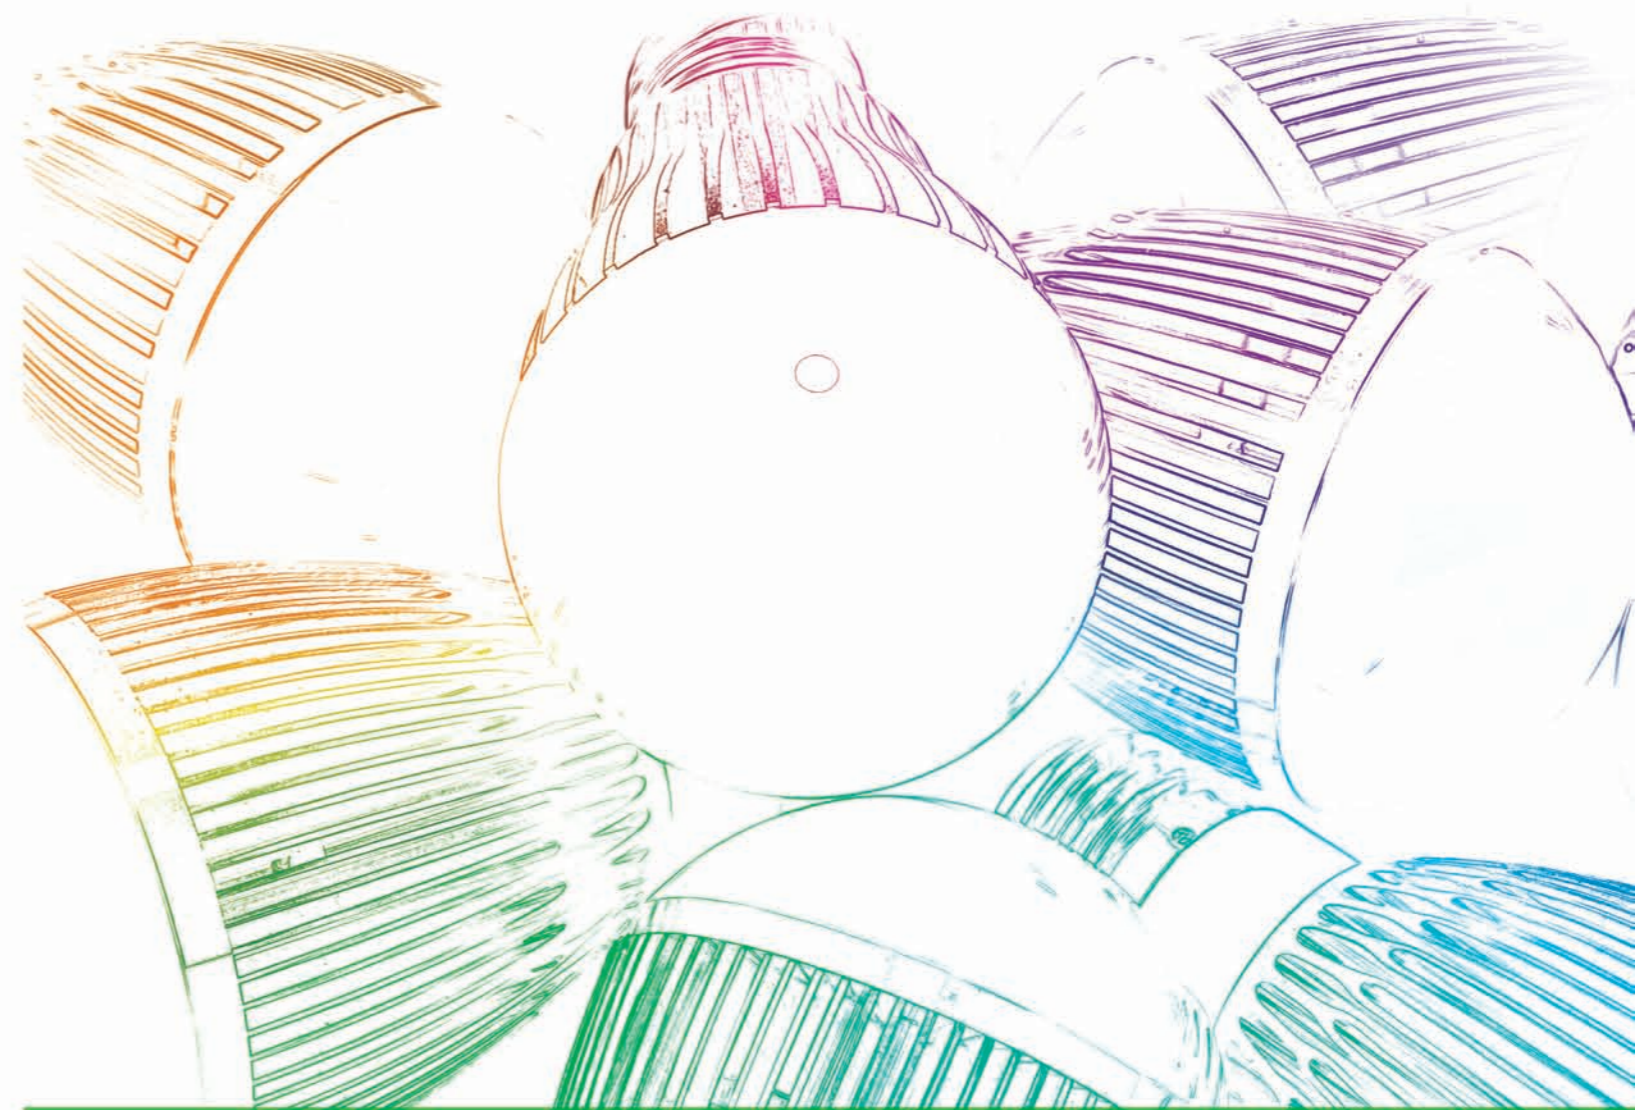

# PRODUCT CATALOGUE

Chinabase Co., Ltd.  
LED Supplier

www.chinabase-e.cn





*Our Standard is Excellent  
Wayne*

About CHINABASE	02
LED Spotlight	04
LED G9	05
LED Bulbs	07
LED Candle	08
LED Tube	09
LED Par Light	11
LED G4 Lamps	12
LED Corn Lamp	13
LED Strip	15
LED Down light	16
LED Flood Light	17
LED High Bay	18
LED Ground Light	19
LED Wall Washer	20
LED Pool Light	21







Chinabase Co., Ltd. is an established high-tech firm specialized in the research, development, engineering, manufacture and marketing of light-emitting diode (LED) based lighting solutions. We have professional engineers always staying at the forefront of LED technology.

The Company's focus is bringing innovation to light by providing high power, energy-efficient and cost-effective LED solutions. Chinabase actively supports its customers by delivering value-added, application-specific solutions that will open up new markets in solid-state lighting (SSL). Customers leverage Chinabase's technology to replace traditional lamp and luminaire technologies (such as incandescent, halogen and fluorescent lighting solutions) with solid-state products that provide high performance and energy-efficient white light for the fast growing interior and exterior application areas. Chinabase's current and future-generation products support global clean energy initiatives by reducing energy consumption and offering environmentally friendly solutions for general lighting applications.


Chinabase drives its LED materials technology development with the goal of delivering the most cost effective and highest quality lighting solutions. This is achieved by focusing both on efficacy, measured in lumens per watt (LPW) and reducing system cost. Chinabase maintains an active focus on both of these key drivers in all product development activities.

Chinabase has a unique vertical integration strategy, which allows the Company to control its core technologies, drive product performance and technical innovation—increasing company value and accelerating revenue growth by delivering high quality light sources at a disruptive price.

Stop unnecessary spending on high energy costs!

You buy from Chinabase with confidence!

# About CHINABASE

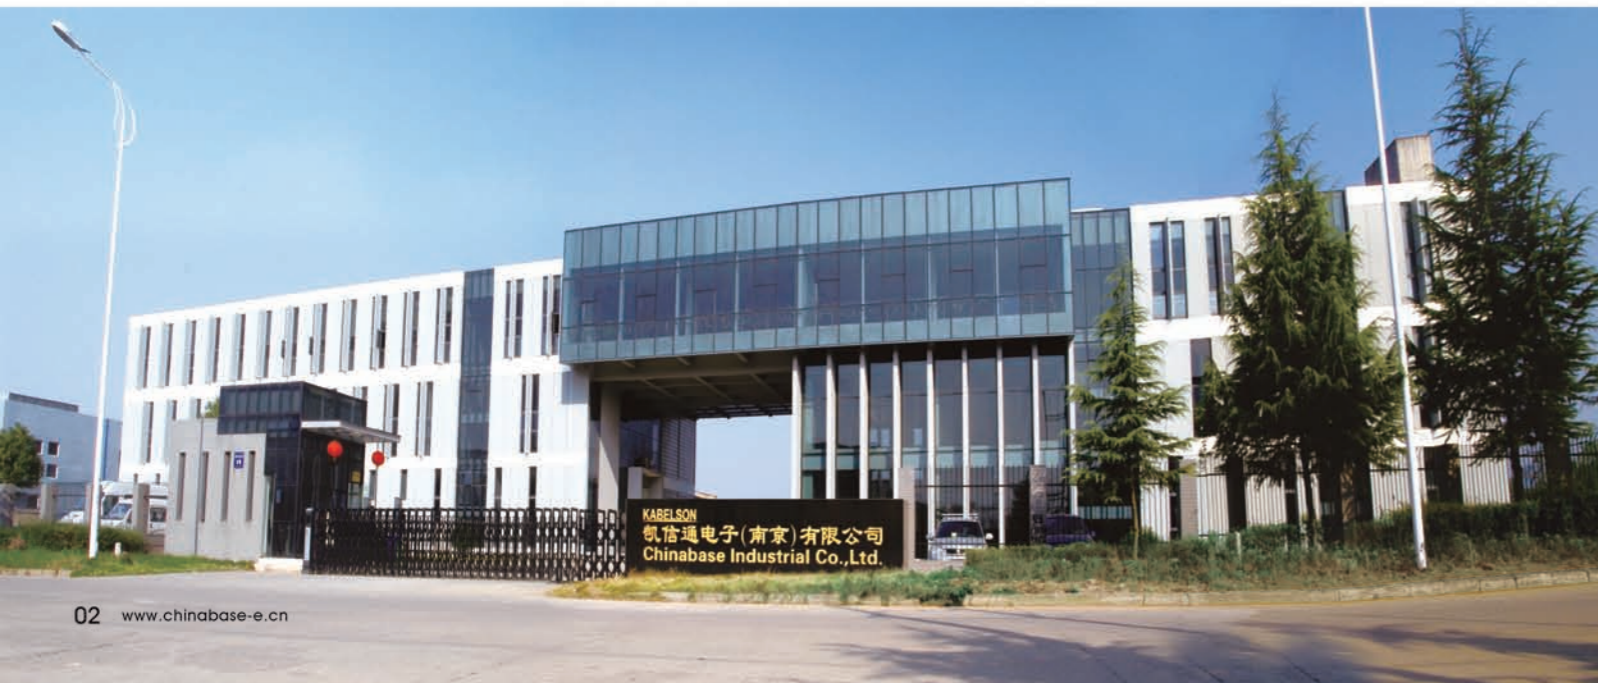

# LED Spotlight Series



CB-MR16-4x1W

Input Voltage	DC12V
Power	4W
Luminous Flux	320 Lm
Ra	>80
CCT	2,700–3,000K, 3,000–3,500K, 6,000–6,500K
Beam Angle	45° / 60°
Fixture Material	Aluminum and PMMA
Lamp Base	MR16
Surface Color	Silver or black
Dimension	± 50x42mm
Operation Temperature	-20–40°C



CB-GU10-4x1W

Input Voltage	AC85–265V
Power	4W
Luminous Flux	320 Lm
Ra	>80
CCT	2,700–3,000K, 3,000–3,500K, 6,000–6,500K
Beam Angle	45° / 60°
Fixture Material	Aluminum and PMMA
Lamp Base	GU10
Surface Color	Silver or black
Dimension	± 50x54mm
Operation Temperature	-20–40°C



CB-MR16-3x1W

Input Voltage	DC12V
Power	3W
Luminous Flux	210 Lm
Ra	>75
CCT	2,700–3,000K, 3,000–3,500K, 6,000–6,500K
Beam Angle	45° / 60°
Fixture Material	Aluminum and PMMA
Lamp Base	MR16
Surface Color	Silver
Dimension	± 50x52mm
Operation Temperature	-20–40°C



CB-GU10-3x1W

Input Voltage	AC85–265V
Power	3W
Luminous Flux	210 Lm
Ra	>75
CCT	2,700–3,000K, 3,000–3,500K, 6,000–6,500K, 6,000–6,500K
Beam Angle	45° / 60°
Fixture Material	Aluminum and PMMA
Lamp Base	GU10
Surface Color	Silver
Dimension	± 50x56mm
Operation Temperature	-20–40°C



# LED Spotlight Series




CB-E14-4x1W

Input Voltage	AC85-265V
Power	4W
Luminous Flux	320 Lm
Ra	>80
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	45° / 60°
Fixture Material	Aluminum and glass
Lamp Base	E14
Surface Color	White
Dimension	∅ 50x74mm
Operation Temperature	-20-40°C



CB-MR16-COB-5W

Input Voltage	DC12V
Power	5W
Luminous Flux	400 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	45°
Fixture Material	Aluminum and PC
Lamp Base	MR16
Surface Color	White and silver
Dimension	∅ 50x54mm
Operation Temperature	-20-40°C

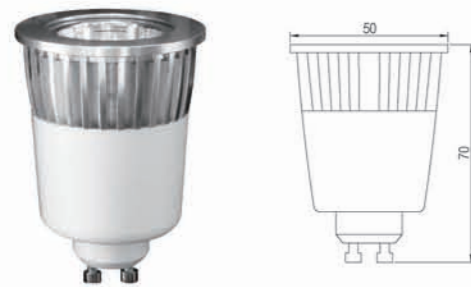

CB-GU10-COB-5W

Input Voltage	AC85-265V
Power	5W
Luminous Flux	400 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	45°
Fixture Material	Aluminum and PC
Lamp Base	GU10
Surface Color	White and silver
Dimension	∅ 50x72mm
Operation Temperature	-20-40°C




CB-E27-COB-5W

Input Voltage	AC85-265V
Power	5W
Luminous Flux	400 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	45°
Fixture Material	Aluminum and glass
Lamp Base	E27/E26
Surface Color	White
Dimension	∅ 50x83mm
Operation Temperature	-20-40°C




# LED G9 Series

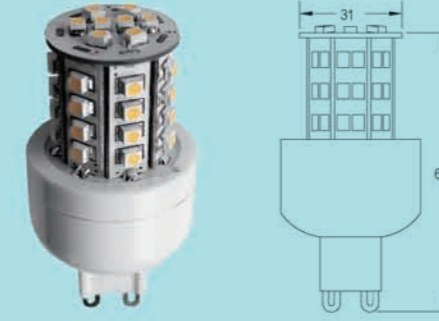

CB-G9-136C

Input Voltage	AC120/230V
Power	2.5W
Luminous Flux	200 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	210°
Fixture Material	Plastic
Lamp Base	G9
Surface Color	White
Dimension	∅ 31x64mm
Operation Temperature	-20-40°C

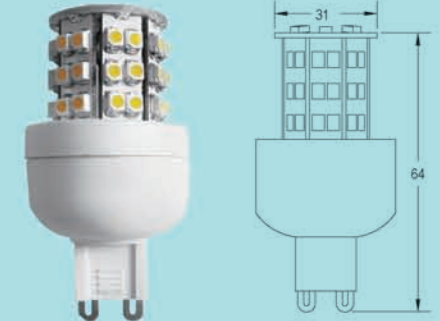


CB-G9-148C

Input Voltage	AC120/230V
Power	3W
Luminous Flux	240 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	210°
Fixture Material	Aluminum and glass
Lamp Base	G9
Surface Color	White
Dimension	∅ 31x64mm
Operation Temperature	-20-40°C



CB-G9-C136C

Input Voltage	AC120/230V
Power	2.5W
Luminous Flux	200 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	210°
Fixture Material	Aluminum and glass
Lamp Base	G9
Surface Color	White
Dimension	∅ 31x68mm
Operation Temperature	-20-40°C

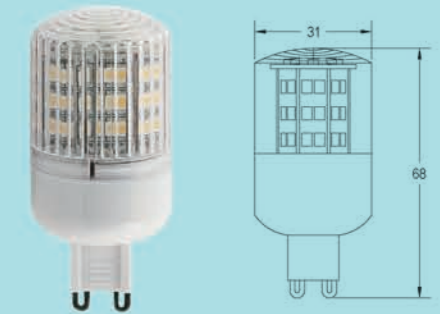

CB-G9-C148C

Input Voltage	AC120/230V
Power	3W
Luminous Flux	240 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	210°
Fixture Material	Aluminum and glass
Lamp Base	G9
Surface Color	White
Dimension	∅ 31x68mm
Operation Temperature	-20-40°C






## LED Bulbs Series

# LED Bulbs Series



CB-B40-3W

Input Voltage	AC85-265V
Power	3W
Luminous Flux	240 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and glass
Lamp Base	E27/E26
Surface Color	White
Dimension	± 40x85mm
Operation Temperature	-20-40°C

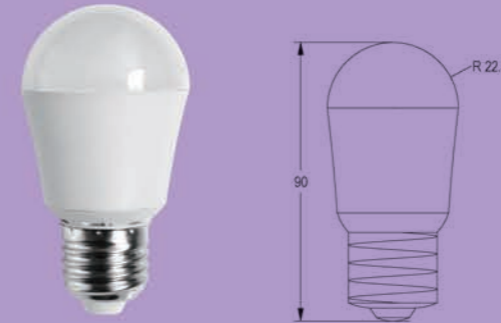

CB-B45-5W

Input Voltage	AC85-265V
Power	5W
Luminous Flux	400 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and glass
Lamp Base	E27/E26
Surface Color	White
Dimension	± 45x90mm
Operation Temperature	-20-40°C



CB-A6-6W

Input Voltage	AC100-240V
Power	6W
Luminous Flux	480 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	210°
Fixture Material	Plastic and Glass
Lamp Base	E27/E26
Surface Color	White
Dimension	± 60x118mm
Operation Temperature	-20-40°C



CB-B60-7W

Input Voltage	AC85-265V
Power	5W
Luminous Flux	400 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and glass
Lamp Base	E27/E26
Surface Color	White
Dimension	± 40x90mm
Operation Temperature	-20-40°C



CB-B80-12W

Input Voltage	AC90-240V
Power	12W
Luminous Flux	960 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and PC
Lamp Base	E27/E26
Surface Color	White
Dimension	± 80x143mm
Operation Temperature	-20-40°C




CB-A70-9x1W

Input Voltage	AC85-265V
Power	9W
Luminous Flux	720 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and PC
Lamp Base	E27/E26
Surface Color	Silver
Dimension	± 72.5x136mm
Operation Temperature	-20-40°C




# LED Candle Series




CB-CA-3W-B

Input Voltage	AC120/230V
Power	3W
Luminous Flux	240 Lm
Ra	>75
CCT	2,700-3,000K,3,000-3,500K,6,000-6,500K
Beam Angle	210°
Fixture Material	Aluminum and glass
Lamp Base	E14
Surface Color	black and matt
Dimension	φ 37x108mm
Operation Temperature	-20-40°C




CB-CA-4W-B

Input Voltage	AC120/230V
Power	4W
Luminous Flux	320 Lm
Ra	>75
CCT	2,700-3,000K,3,000-3,500K,6,000-6,500K
Beam Angle	210°
Fixture Material	Aluminum and glass
Lamp Base	E14
Surface Color	black and matt
Dimension	φ 37x108mm
Operation Temperature	-20-40°C




CB-CAB-3W-B

Input Voltage	AC120/230V
Power	3W
Luminous Flux	240 Lm
Ra	>75
CCT	2,700-3,000K,3,000-3,500K,6,000-6,500K
Beam Angle	210°
Fixture Material	Aluminum and glass
Lamp Base	E14
Surface Color	black and matt
Dimension	φ 40x90mm
Operation Temperature	-20-40°C



CB-CAB-4W-B

Input Voltage	AC120/230V
Power	4W
Luminous Flux	320 Lm
Ra	>75
CCT	2,700-3,000K,3,000-3,500K,6,000-6,500K
Beam Angle	210°
Fixture Material	Aluminum and glass
Lamp Base	E14
Surface Color	black and matt
Dimension	φ 50x98mm
Operation Temperature	-20-40°C



CB-CAC-3W-B

Input Voltage	AC85-265V
Power	3W
Luminous Flux	240 Lm
Ra	>75
CCT	2,700-3,000K,3,000-3,500K,6,000-6,500K
Beam Angle	160°
Fixture Material	Ceramic and glass
Lamp Base	E14
Surface Color	black and matt
Dimension	φ 37x108mm
Operation Temperature	-20-40°C

# LED Tube Series




CB-T8-2F

Input Voltage	AC85-265V
Power	7.2W
Luminous Flux	520 Lm
Ra	>75
CCT	2,700-3,000K,3,000-3,500K,6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and PC
Lamp Base	G13
Surface Color	Silver
Dimension	φ 26x588mm
Operation Temperature	-20-40°C

CB-T8-3F

Input Voltage	AC85-265V
Power	13W
Luminous Flux	1200 Lm
Ra	>75
CCT	2,700-3,000K,3,000-3,500K,6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and PC
Lamp Base	G13
Surface Color	Silver
Dimension	φ 26x898mm
Operation Temperature	-20-40°C

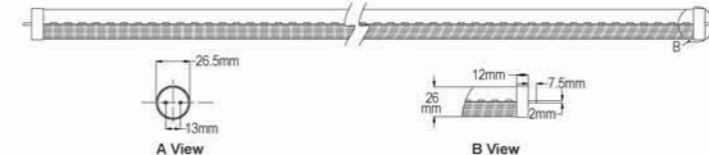

CB-T8-4F

Input Voltage	AC85-265V
Power	16W
Luminous Flux	1600 Lm
Ra	>75
CCT	2,700-3,000K,3,000-3,500K,6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and glass
Lamp Base	G13
Surface Color	White
Dimension	φ 26x1198mm
Operation Temperature	-20-40°C

CB-T8-5F


Input Voltage	AC85-265V
Power	22W
Luminous Flux	1900 Lm
Ra	>75
CCT	2,700-3,000K,3,000-3,500K,6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and glass
Lamp Base	G13
Surface Color	White
Dimension	φ 26x1500mm
Operation Temperature	-20-40°C



# LED Par Light Series




CB-PAR22-7W



Input Voltage	AC90-240V
Power	7W
Luminous Flux	380 Lm
Ra	>80
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	45° /60°
Fixture Material	Aluminum and PMMA
Lamp Base	E27/E26
Surface Color	White
Dimension	φ 67x96mm
Operation Temperature	-20-40°C




CB-PAR22-8W



Input Voltage	AC90-240V
Power	8W
Luminous Flux	450 Lm
Ra	>80
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and PC
Lamp Base	E27/E26
Surface Color	White
Dimension	φ 67x96mm
Operation Temperature	-20-40°C




CB-PAR30-9W



Input Voltage	AC90-240V
Power	9W
Luminous Flux	550 Lm
Ra	>80
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	45° /60°
Fixture Material	Aluminum and PMMA
Lamp Base	E27/E26
Surface Color	White
Dimension	φ 96x123mm
Operation Temperature	-20-40°C




CB-PAR30-12W



Input Voltage	AC85-265V
Power	12W
Luminous Flux	960 Lm
Ra	>80
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and glass
Lamp Base	E26/E27
Surface Color	White
Dimension	φ 96x123mm
Operation Temperature	-20-40°C



CB-PAR30-40W



Input Voltage	AC85-265V
Power	40W
Luminous Flux	2800 Lm
Ra	>80
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	45° /60°
Fixture Material	Aluminum and glass
Lamp Base	E27/E26
Surface Color	White
Dimension	φ 95x120mm
Operation Temperature	-20-40°C




CB-PAN-300300



Input Voltage	AC85-265V
Power	18W
Luminous Flux	1400 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and PMMA
Power Connector	Bare cable
Surface Color	White
Dimension	300x300x13.5mm
Operation Temperature	-20-40°C



CB-PAN-300600



Input Voltage	AC85-265V
Power	36W
Luminous Flux	5700 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and PMMA
Power Connector	Bare cable
Surface Color	White
Dimension	300x600x13.5mm
Operation Temperature	-20-40°C




CB-PAN-600600



Input Voltage	AC85-265V
Power	30W
Luminous Flux	2400 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and PMMA
Power Connector	Bare cable
Surface Color	White
Dimension	600x600x8mm
Operation Temperature	-20-40°C




CB-PAN-3001200



Input Voltage	AC85-265V
Power	36W
Luminous Flux	2800 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and PMMA
Power Connector	Bare cable
Surface Color	White
Dimension	300x1200x13.5mm
Operation Temperature	-20-40°C




CB-PAN-6001200



Input Voltage	AC85-265V
Power	72W
Luminous Flux	5700 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and PMMA
Power Connector	Bare cable
Surface Color	White
Dimension	600x1200x8mm
Operation Temperature	-20-40°C




# LED G4 Lamps Series




CB-G4-SMD5050-9T

Input Voltage	DC12V
Power	1.8W
Luminous Flux	140 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	210°
Fixture Material	PCB
Lamp Base	G4
Surface Color	White
Dimension	∅ 18x40mm
Operation Temperature	-20-40°C




CB-G4-SMD3528-15T

Input Voltage	DC12V
Power	1.2W
Luminous Flux	70 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	210°
Fixture Material	PCB
Lamp Base	G4
Surface Color	White
Dimension	∅ 18x40mm
Operation Temperature	-20-40°C




CB-G4-6SMD5050

Input Voltage	DC12V
Power	1.2W
Luminous Flux	70 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	PCB
Lamp Base	G4
Surface Color	White
Dimension	∅ 25&L35mm
Operation Temperature	-20-40°C




CB-G4-1 DIP

Input Voltage	DC12V
Power	1W
Luminous Flux	60 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	60°
Fixture Material	Aluminum and PC
Lamp Base	G4
Surface Color	Silver
Dimension	∅ 12x28mm
Operation Temperature	-20-40°C




CB-CO-20W

Input Voltage	AC85-277V
Power	20W
Luminous Flux	2000 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	210°
Fixture Material	Plastic and Aluminum
Lamp Base	E26/E27/E39/E40
Surface Color	White
Dimension	∅ 90x185mm
Operation Temperature	-30-50°C




CB-CO-30W

Input Voltage	AC85-277V
Power	30W
Luminous Flux	3000 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	210°
Fixture Material	Plastic and Aluminum
Lamp Base	E26/E27/E39/E40
Surface Color	White
Dimension	∅ 90x218mm
Operation Temperature	-30-50°C




CB-CO-40W

Input Voltage	AC85-277V
Power	40W
Luminous Flux	4000 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	210°
Fixture Material	Plastic and Aluminum
Lamp Base	E26/E27/E39/E40
Surface Color	White
Dimension	∅ 90x258mm
Operation Temperature	-30-50°C



CB-CO-60W

Input Voltage	AC85-277V
Power	60W
Luminous Flux	6000 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	210°
Fixture Material	Plastic and Aluminum
Lamp Base	E26/E27/E39/E40
Surface Color	White
Dimension	∅ 90x278mm
Operation Temperature	-30-50°C



CB-CO-80W

Input Voltage	AC85-277V
Power	80W
Luminous Flux	8000 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	210°
Fixture Material	Plastic and Aluminum
Lamp Base	E26/E27/E39/E40
Surface Color	White
Dimension	∅ 105x280mm
Operation Temperature	-30-50°C




CB-CO-100W

Input Voltage	AC85-277V
Power	100W
Luminous Flux	10000 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	210°
Fixture Material	Plastic and Aluminum
Lamp Base	E26/E27/E39/E40
Surface Color	White
Dimension	∅ 105x300mm
Operation Temperature	-30-50°C




# LED Corn Lamp Series

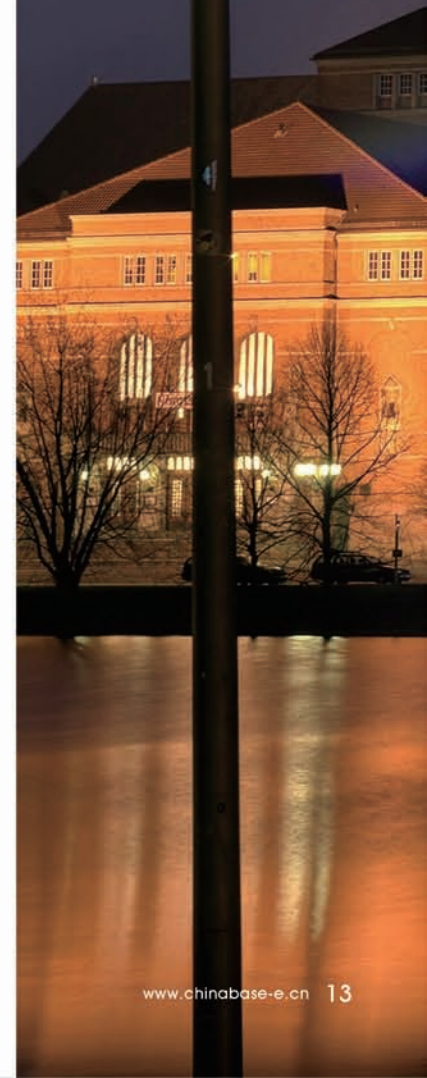



# LED Strip Series

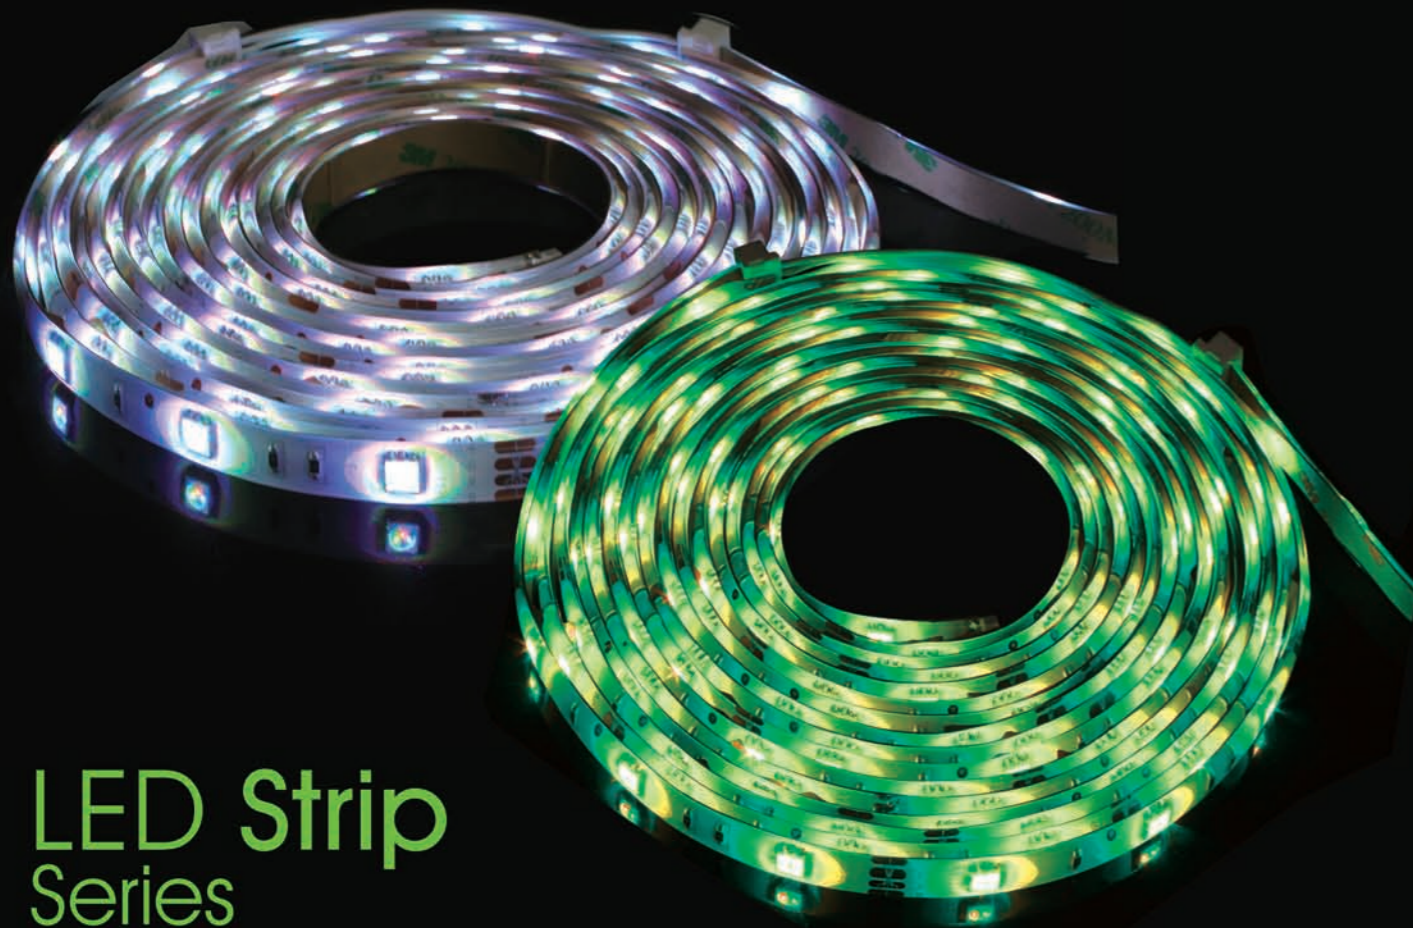

# LED Strip Series




CB-LS-3528-60

Input Voltage	DC12V/24V
Power	4.8W
Luminous Flux	5 Luminous per LED
LED quantity per meter	60 pcs
Color	All types of single color, or dual color switch
Beam Angle	140°
Fixture Material	Copper
Power connector	DC jack/2 pin jack, 4 pin jack
Surface Color	White/yellow
IP grade	IP20/IP65/IP67
Dimension	8/10x1000mm
Operation Temperature	-20-40°C




CB-LS-3528-120

Input Voltage	DC12V/24V
Power	9.6W
Luminous Flux	5 Luminous per LED
LED quantity per meter	120 pcs
Color	All types of single color, or dual color switch
Beam Angle	140°
Fixture Material	Copper
Power connector	DC jack/2 pin jack, 4 pin jack
Surface Color	White/yellow
IP grade	IP20/IP65/IP67
Dimension	8/10x1000mm
Operation Temperature	-20-40°C

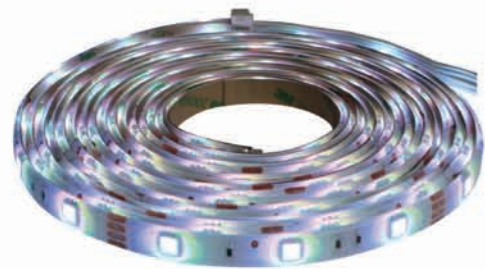

CB-LS-5050-30

Input Voltage	DC12V/24V
Power	7.2W
Luminous Flux	16 Luminous per LED
LED quantity per meter	30 pcs
Lighting Color	All types of single color and RGB
Beam Angle	140°
Fixture Material	Copper
Power connector	DC jack/2 pin jack, 4 pin jack
Surface Color	White/yellow
IP grade	IP20/IP65/IP67
Dimension	8/10/12x1000mm
Operation Temperature	-20-40°C

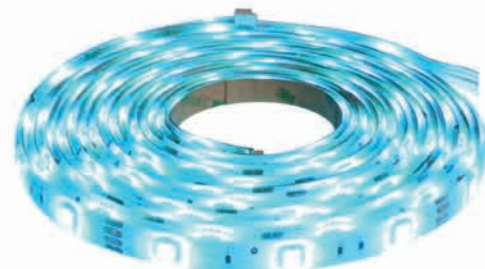

CB-LS-5050-60

Input Voltage	DC12V/24V
Power	14.4W
Luminous Flux	16 Luminous per LED
LED quantity per meter	60 pcs
Lighting Color	All types of single color and RGB
Beam Angle	140°
Fixture Material	Copper
Power connector	DC jack/2 pin jack, 4 pin jack
Surface Color	White/yellow
IP grade	IP20/IP65/IP67
Dimension	10/12x1000mm
Operation Temperature	-20-40°C



CB-LSH-3528-60

Input Voltage	AC120V/230V
Power	3.6W
Luminous Flux	5 Luminous per LED
LED quantity per meter	60 pcs
Color	All types of single color
Beam Angle	140°
Fixture Material	Copper
Power connector	Water proof plug
Surface Color	White/yellow
IP grade	IP65/IP67
Dimension	4x1000mm
Operation Temperature	-20-40°C



CB-LSH-5050-60


Input Voltage	AC120V/230V
Power	14.4W
Luminous Flux	16 Luminous per LED
LED quantity per meter	60 pcs
Color	All types of single color and RGB
Beam Angle	140°
Fixture Material	Copper
Power connector	Water proof plug
Surface Color	White/yellow
IP grade	IP65/IP67
Dimension	6x1000mm
Operation Temperature	-20-40°C








# LED Down Light Series

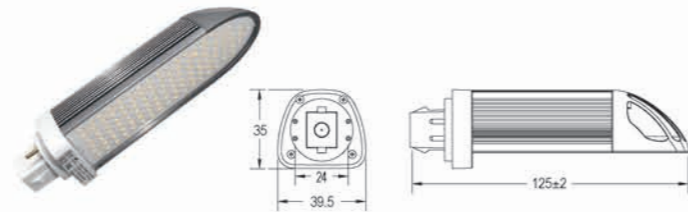


## CB-G24-6W

Input Voltage	AC85-265V
Power	6W
Luminous Flux	600 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and PC
Lamp Base	G24 2pin/4pin
Surface Color	Black
Dimension	39.5X35x125mm
Operation Temperature	-20-40°C

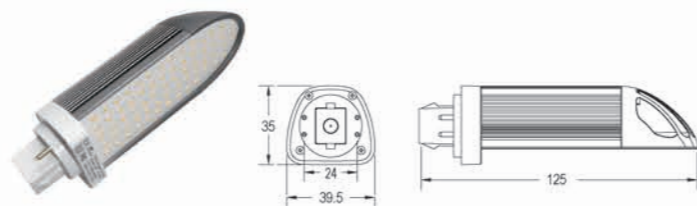


## CB-G24-8W

Input Voltage	AC85-265V
Power	8W
Luminous Flux	800 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and PC
Lamp Base	G24 2pin/4pin
Surface Color	Black
Dimension	39.5X35x125mm
Operation Temperature	-20-40°C

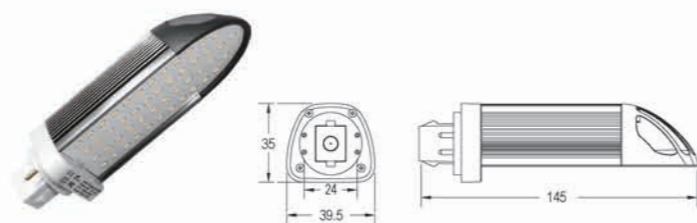


## CB-G24-11W

Input Voltage	AC85-265V
Power	11W
Luminous Flux	1100 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and PC
Lamp Base	G24 2pin/4pin
Surface Color	Black
Dimension	39.5X35x145mm
Operation Temperature	-20-40°C

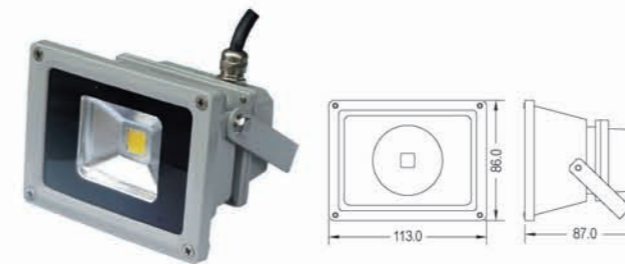


## CB-FL-10W

Input Voltage	AC85-265V
Power	10W
Luminous Flux	700 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and glass
IP grade	IP65
Surface Color	silver and black
Dimension	113x86x87mm
Operation Temperature	-30-50°C

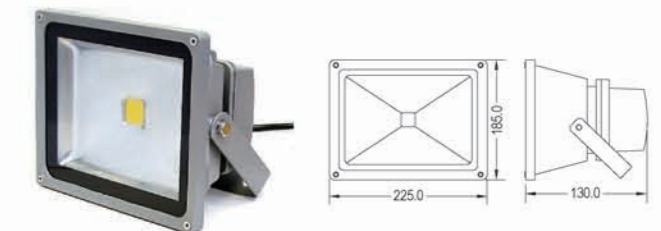


## CB-FL-30W

Input Voltage	AC85-265V
Power	30W
Luminous Flux	2400 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and glass
IP grade	IP65
Surface Color	Silver
Dimension	225x185x130mm
Operation Temperature	-20-40°C

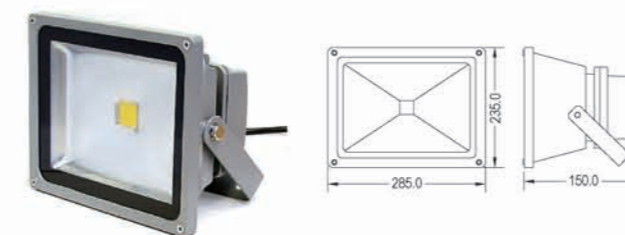

## CB-FL-50W

Input Voltage	AC85-265V
Power	50W
Luminous Flux	4000 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and glass
IP grade	IP65
Surface Color	Silver
Dimension	285x235x150mm
Operation Temperature	-30-50°C

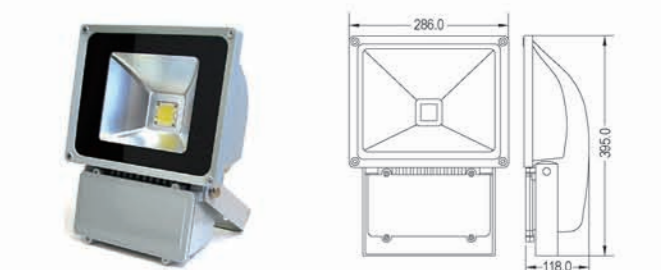


## CB-FL-90W

Input Voltage	AC85-265V
Power	90W
Luminous Flux	7200 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and glass
IP grade	IP65
Surface Color	Silver
Dimension	286x395x118
Operation Temperature	-30-50°C






# LED High Bay Series




CB-HB-30W

Input Voltage	AC85-265V
Power	30W
Luminous Flux	2400 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and glass
IP grade	IP65
Surface Color	Silver
Dimension	± 465x476.5mm
Operation Temperature	-30-50°C




CB-HB-60W

Input Voltage	AC85-265V
Power	60W
Luminous Flux	4800 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and glass
IP grade	IP65
Surface Color	White
Dimension	± 465x491mm
Operation Temperature	-30-50°C




CB-HB-90W

Input Voltage	AC85-265V
Power	90W
Luminous Flux	7200 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and glass
IP grade	IP65
Surface Color	Silver
Dimension	± 465x502mm
Operation Temperature	-30-50°C




CB-HB-200W

Input Voltage	AC85-265V
Power	200W
Luminous Flux	16000 Lm
Ra	>75
CCT	2,700-3,000K, 3,000-3,500K, 6,000-6,500K
Beam Angle	140°
Fixture Material	Aluminum and glass
IP grade	IP65
Surface Color	Silver
Dimension	± 465x646.5mm
Operation Temperature	-30-50°C




CB-GR-3x1W

Input Voltage	DC12/24V, AC120/230V
Power	3W
Luminous Flux	210 Lm
Ra	>75
Lighting color	All types of single color and RGB
Beam Angle	60°
Fixture Material	Aluminum and glass
IP grade	IP65
Surface Color	Silver
Dimension	± 100x70mm
Operation Temperature	-30-50°C




CB-GR-5x1W

Input Voltage	AC85-265V
Power	5W
Luminous Flux	350 Lm
Ra	>75
Lighting color	All types of single color and RGB
Beam Angle	60°
Fixture Material	Aluminum and glass
IP grade	IP65
Surface Color	Silver
Dimension	± 150x60mm
Operation Temperature	-30-50°C



CB-GR-9x1W

Input Voltage	AC85-265V
Power	9W
Luminous Flux	630 Lm
Ra	>75
Lighting color	All types of single color and RGB
Beam Angle	60°
Fixture Material	Aluminum and glass
IP grade	IP65
Surface Color	Silver
Dimension	± 180x60mm
Operation Temperature	-30-50°C




CB-GR-16x1W

Input Voltage	AC85-265V
Power	16W
Luminous Flux	1100 Lm
Ra	>75
Lighting color	All types of single color and RGB
Beam Angle	60°
Fixture Material	Aluminum and glass
IP grade	IP65
Surface Color	Silver
Dimension	220x220x60mm
Operation Temperature	-30-50°C




# LED Ground Light Series



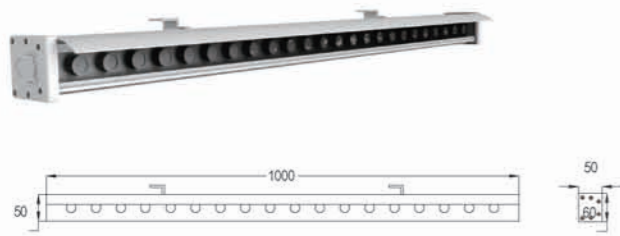


CB-WW-18x1W-5060

Input Voltage	DC24V/AC120V/230V
Power	18W
Luminous Flux	1200 Lm
Ra	>75
Lighting color	All types of single color and RGB
Beam Angle	60°
Fixture Material	Aluminum and PMMA
IP grade	IP65
Surface Color	White
Dimension	50x60x1000mm
Operation Temperature	-30~50°C

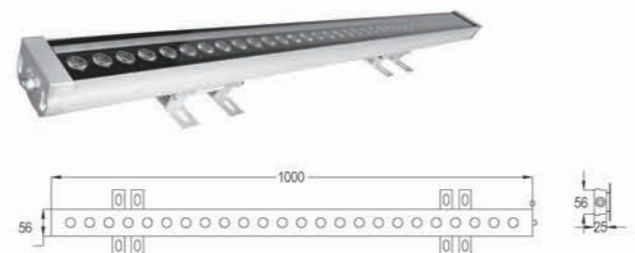

CB-WW-24x1W-5625

Input Voltage	DC24V/AC120V/230V
Power	24W
Luminous Flux	1600 Lm
Ra	>75
Lighting color	All types of single color and RGB
Beam Angle	60°
Fixture Material	Aluminum and glass
IP grade	IP65
Surface Color	White
Dimension	56x25x1000mm
Operation Temperature	-30~50°C

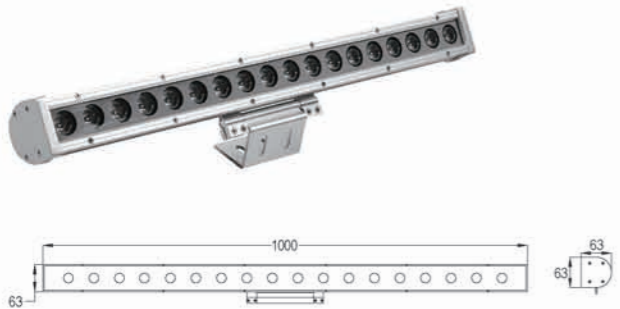

CB-WW-18x1W-6363

Input Voltage	DC24V/AC120V/230V
Power	18W
Luminous Flux	1200 Lm
Ra	>75
Lighting color	All types of single color and RGB
Beam Angle	60°
Fixture Material	Aluminum and PMMA
IP grade	IP65
Surface Color	White
Dimension	63x63mmx1000mm
Operation Temperature	-30~50°C





CB-WW-36x1W-7868

Input Voltage	DC24V/AC120V/230V
Power	36W
Luminous Flux	2500 Lm
Ra	>75
Lighting color	All types of single color and RGB
Beam Angle	60°
Fixture Material	Aluminum and PMMA
IP grade	IP65
Surface Color	White
Dimension	78x68x1000mm
Operation Temperature	-30~50°C



LED Pool Light Series




CB-PL-9x1W-160180 ①

Input Voltage	DC24V, AC110-230V
Power	9W
Luminous Flux	630 Lm (cold white)
Ra	>75
Lighting color	All types of single color and RGB
Beam Angle	60°
Fixture Material	Aluminum and glass
IP grade	IP68
Surface Color	White
Dimension	160x180mm
Operation Temperature	-30~50°C

CB-PL-12x1W-160110 ②

Input Voltage	DC24V, AC110-230V
Power	12W
Luminous Flux	840 Lm (cold white)
Ra	>75
Lighting color	All types of single color and RGB
Beam Angle	60°
Fixture Material	Aluminum and glass
IP grade	IP68
Surface Color	White
Dimension	160x110mm
Operation Temperature	-30~50°C



CB-PL-12x1W-130175 ③

Input Voltage	DC24V, AC110-230V
Power	12W
Luminous Flux	840 Lm (cold white)
Ra	>75
Lighting color	All types of single color and RGB
Beam Angle	60°
Fixture Material	Aluminum and glass
IP grade	IP68
Surface Color	White
Dimension	130x175mm
Operation Temperature	-30~50°C

CB-PL-9x1W-16065 ④

Input Voltage	DC24V, AC110-230V
Power	9W
Luminous Flux	630 Lm (cold white)
Ra	>75
Lighting color	All types of single color and RGB
Beam Angle	60°
Fixture Material	Aluminum and glass
IP grade	IP68
Surface Color	White
Dimension	160x65mm
Operation Temperature	-30~50°C

LED Wall Washer Series

